

LexFoam 1909 fullback double

NEW 06/2020

AERO®

TECHNICAL CERTIFICATE AND INSTRUCTIONS




SPECIFICATION

| | |
|--------------------------|---|
| COATING | The AERO® LexFoam double coating is a special double latex coating with a sand finish, which provides perfect grip in dry, damp and oily environments, a good lifespan, and strong protection. The first smooth latex coating is non-breathable (a total barrier against fluid and air permeation). The second surface layer is designed to increase friction between the glove and the lifted object, thereby ensuring that the glove grips it perfectly. The double coating eliminates the effect of pressure on the hands when handling hard objects, as well as insulating the hands. |
| KNITTED FABRIC | Latex |
| UNDERLAY FINENESS | Fine 15 |
| SIZES | M/7, L/8, XL/9, XXL/10 |
| CHARACTERISTICS | The compact coating forms a barrier against permeation by fluids and oils |
| PROTECTION | Abrasion, resistance to chemicals |
| USE | Glass production, automotive industry, petrochemical industry, engineering, construction, civil engineering, logistics and warehousing, transportation, repair works. |



EVALUATION (PALM SIDE)

| | | | | | |
|---|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| Grip when dry | <input type="checkbox"/> |
| Grip when wet | <input type="checkbox"/> |
| Slip-resistant treatment for contact with oil | <input type="checkbox"/> |
| Resistance to permeation by H ₂ O solution | <input type="checkbox"/> |
| Breathability | <input type="checkbox"/> |
| Knitted fabric softness | <input type="checkbox"/> |
| Wearing comfort level | <input type="checkbox"/> |

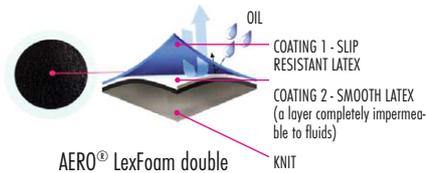

MECHANICAL PROTECTION

| | | | | | | |
|---|-----|-----|------|------|------|----|
| Abrasion resistance (cycles) | 100 | 500 | 2000 | 8000 | | |
| Based on the number of cycles necessary to tear through a sample of the glove | | | | | | |
| Resistance to cutting (index) | 1,2 | 2,5 | 5,0 | 10,0 | 20,0 | |
| Based on the number of blade cycles necessary to cut through a sample at a constant speed | | | | | | |
| Resistance to tearing (Newton) | 10 | 25 | 50 | 75 | | |
| Based on the force necessary to tear the sample | | | | | | |
| Resistance to puncturing (Newton) | 20 | 60 | 100 | 150 | | |
| Based on the force necessary to puncture the sample with a standard-sized point | | | | | | |
| Resistance to cutting (Newton) | 2 | 5 | 10 | 15 | 22 | 30 |
| TDM resistance to cutting according to EN 388:2016 ISO 13997 | | | | | | |

PACKING DETAILS

| Size | Carton size Carton volume Carton weight | Packaging of individual pair | Number of pairs in package | Number of pairs in carton | Barcode 1 pair | Barcode carton |
|--------|---|------------------------------------|----------------------------------|---------------------------------|--|---|
| S/6 | 46 x 29 x 27 cm 0.036 m ³ 9 kg | YES | 12 | 120 |  8 595683 004039 |  8 595683 004046 |
| M/7 | 46 x 29 x 27 cm 0.036 m ³ 9 kg | YES | 12 | 120 |  8 595683 004053 |  8 595683 004060 |
| L/8 | 46 x 29 x 27 cm 0.036 m ³ 9 kg | YES | 12 | 120 |  8 595683 004077 |  8 595683 004084 |
| XL/9 | 46 x 29 x 27 cm 0.036 m ³ 9 kg | YES | 12 | 120 |  8 595683 004091 |  8 595683 004107 |
| XXL/10 | 46 x 29 x 27 cm 0.036 m ³ 9 kg | YES | 12 | 120 |  8 595683 004114 |  8 595683 004121 |
| 3XL/11 | 46 x 29 x 27 cm 0.036 m ³ 9 kg | YES | 12 | 120 |  8 595683 004138 |  8 595683 004121 |

STORAGE

The products should be stored in dry and well-ventilated areas. Excessive air humidity, temperature or intensive light may affect quality of the gloves. The supplier bears no responsibility for damage incurred due to the afore-mentioned causes.

MANUFACTURER'S RECOMMENDATION

Use the gloves according to the assessed risks, in accordance with the appropriate norms. The content of the appropriate norms will be provided to you, on request, by an authorized distributor of the AERO and WORKSHOP brands.

 Sign of conformity with harmonised European CAT norms. II. Gloves for work and protection against medium risks, e.g. in the case of gloves for general handling, good protection against cutting, puncturing and abrasion must be subject to independent testing, and must be certified by an official body.

 The pictograms on the left indicate that the user must read the information leaflet (in every package) before using the gloves.